

VIBRATING RIPPER

(20 TONNE TO 60 TONNE RANGE)



Contatore Engineering offer a range of Vibrating rippers that are efficient in the demolition of medium hardness materials.


The function of the Vibrating Ripper is controlled from within the excavator's cabin.

- Suitable for 20 tonne to 60 tonne machines (Excavators).
- Modern design with quality robust construction.
- Includes low noise technology
- Perfect for the demolition of materials that are too hard for a traditional buckets and too soft for efficient rock-breakers such as limestone, bauxite, coffee rock etc...

MODEL: RVS 2200	
WEIGHT	2200 kg
PRESSURE	200-220 bar
OIL FLOW	180 l/min
FREQUENCY	1700 rpm
VIBRATE FORCE	210 kn
EXCAVATOR SIZE	20-28 tonne

MODEL: RVS 3300	
WEIGHT	3300 kg
PRESSURE	200-220 bar
OIL FLOW	200 l/min
FREQUENCY	1600 rpm
VIBRATE FORCE	350 kn
EXCAVATOR SIZE	30-40 tonne

MODEL: RVS 4900	
WEIGHT	4900 kg
PRESSURE	200-220 bar
OIL FLOW	230 l/min
FREQUENCY	1600 rpm
VIBRATE FORCE	540 kn
EXCAVATOR SIZE	43-60 tonne

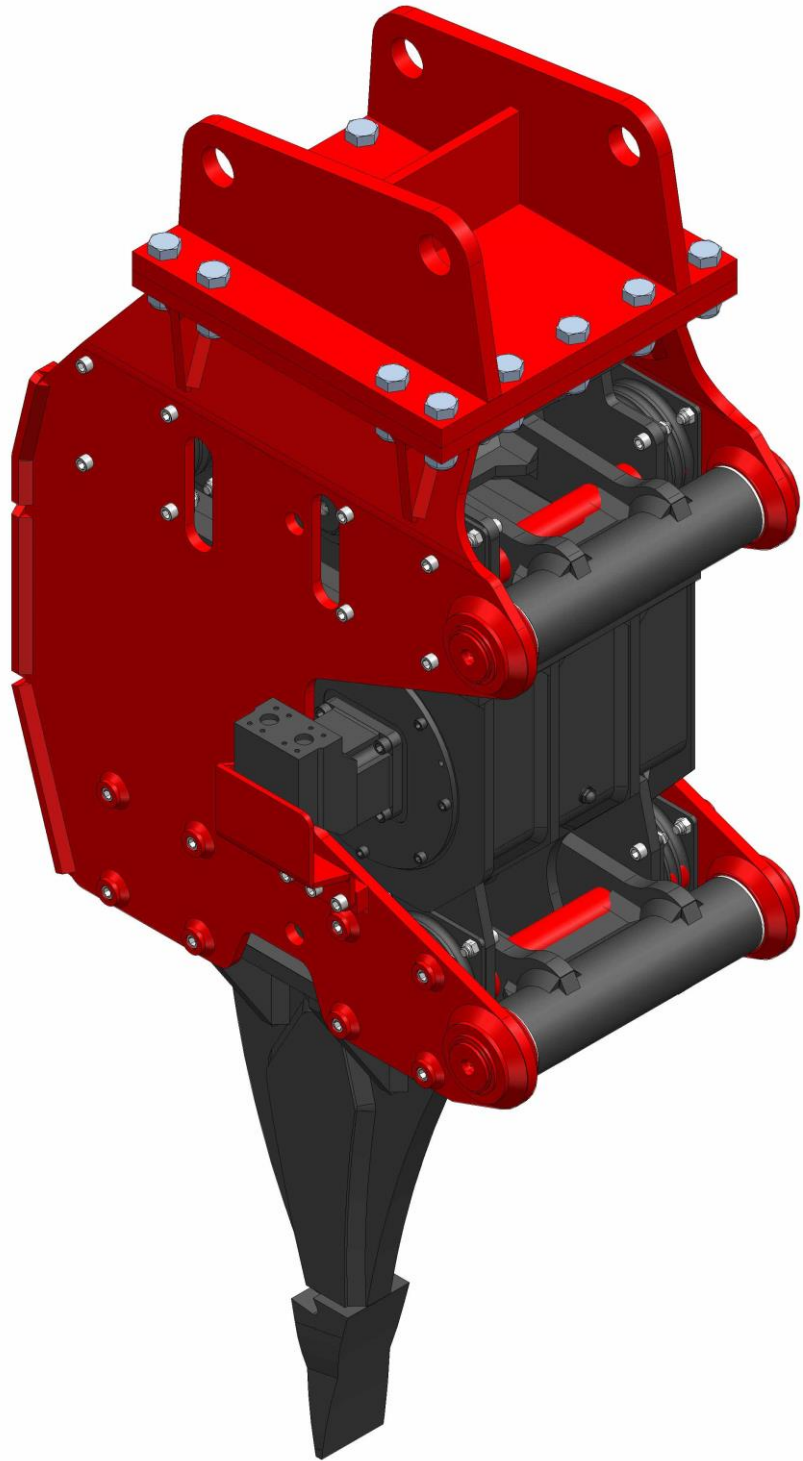

ABN 39 119 888 505

www.contatoreengineering.com.au

97 Radium Street
Welshpool, WA, 6106

☎: (08) 9356 2725

☎: (08) 9351 8275

✉: admin@contatoreengineering.com.au