

Tyre Handler 3T - 10T Range

Delivering
Engineering
Excellence




Quality
ISO 9001
SAI GLOBAL

Series 1 Tyre Handlers

Clamping Span		
Model	"A"	"B"
CE3000TH-S1	1120	2900
CE4500TH-S1	1310	3650
CE6000TH-S1	1250	3800
CE8000TH-S1	1450	4300
CE10000TH-S1	1600	4500


Body Rotation		
Model	"C"	"D"
CE3000TH-S1	15°	15°
CE4500TH-S1	15°	15°
CE6000TH-S1	15°	15°
CE8000TH-S1	15°	15°
CE10000TH-S1	15°	15°

Pad Tilt	
Model	"E"
CE3000TH-S1	110°
CE4500TH-S1	110°
CE6000TH-S1	110°
CE8000TH-S1	110°
CE10000TH-S1	115°

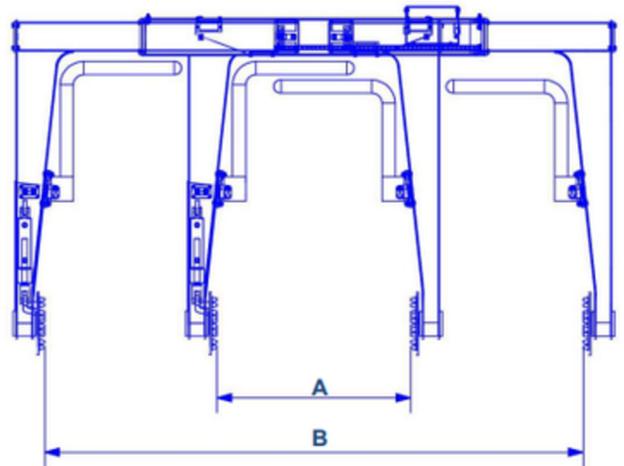


Plan View

Note: All Tyre Handlers come standard with a 200mm body side shift movement (100mm each side of center line).

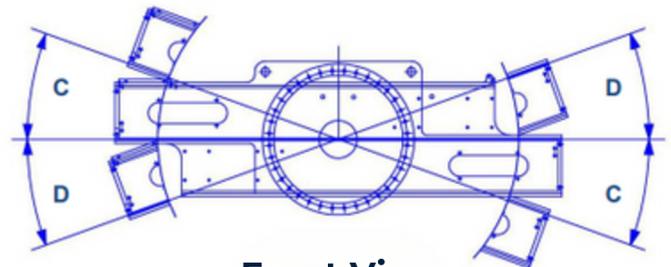

Front View

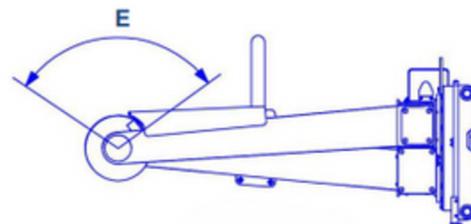

Side View

Contatore Engineering offers a range of Tyre Handlers that are secure, versatile & the industry preferred method of handling large tyres. The functions of the Tyre Handler is controlled from within the loader cabin.

- Working Load Limits (WLL) range from **3 tonne to 10 tonne capacity**.
- Modern design with **quality robust construction**.
- Includes tyre arrestor arms for **added safety**.
- **Hydraulic Tyre Handler functions** with electric joystick controls.
- **Safety switch activation** required in conjunction with joystick control to release clamped tyre, avoiding accidental release of the tyre.

Contact Us

97 Radium Street, Welshpool
WA 6106

(08) 9356 2725

enquiries@contatoreengineering.com.au

www.contatoreengineering.com.au